

3M™ Peltor™ Ground Mechanic Adapters

FL5006 GB, FL5006-01, FL5006-02 GB, FL5006-03 GB

Product description

The PTT button is logically placed so that it is easy to access with either hand. The design makes it easy to use even with heavy gloves. The PTT button has a specific pressure point. The jack is at a 10 degree angle to the fixed cord and positioned so that the headset is easy to plug in and unplug in all situations.

Key Features:

- Designed to fit the shape of the hand
- Clamp can be twisted 360 degrees
- Oil resistant cable

Applications

- Ground Mechanic work (push back)

Standards and Approval:

The Product has been shown to meet the requirements of the European Directive 2004/108/EC and is thus CE marked. The product has been verified in accordance with EN61000-6-2:2005.

Size:

PTT house: 80x60x40 mm

Materials and data:

Box: TPE

Cable: Self extinguishing PUR sheeting

Model	Cable	Connector
FL5006 GB	6-cores neon green, 3,1-5,6 m	3-pole ⌀ 6,3 mm
FL5006-01	6-cores black, 6,4-8,9 m	3-pole ⌀ 6,3 mm
FL5006-02 GB	6-cores neon green, 3,0-6,0 m	3-pole ⌀ 6,34 mm
FL5006-03 GB	6-cores, neon green, 3,5-10 m	3-pole ⌀ 6,34 mm

Connector and cable:

PTT house connector: 4-pole, TP-120 equivalent

Function:

FL5006-03 GB is equipped with a switch for constant PTT function for special purposes.

Use and storage:


Storage temperature: -20°C to +55°C, humidity <85%

Usage temperature: -20°C to +55°C


Maximum recommended shelf life: 5 years

Use limitations:

Never modify or alter this product.

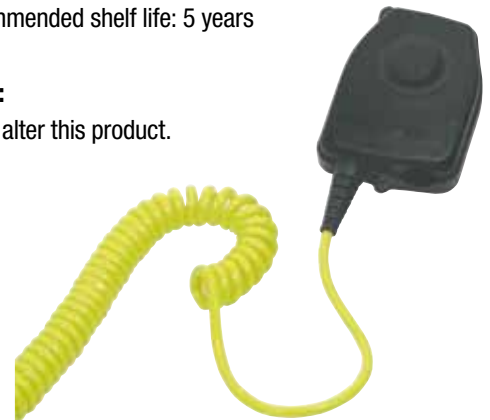

Picture



Warranty:

The warranty does not cover any damage caused by neglected maintenance or careless handling. For more information on maintenance, please see the user instruction. For complete warranty condition, contact your dealer or local 3M office.

Important Notice:

3M does not accept liability of any kind, be it direct or consequential (including, but not limited to, loss of profits, business and/or goodwill) arising from reliance upon any information herein provided by 3M. The user is responsible for determining the suitability of the products for their intended use. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence.



3M Occupational Health &
Environmental Safety Division
3M Svenska AB, Box 2341
SE-331 02 Värnamo
Sweden

Phone: +46 (0) 370 65 65 65
Fax: +46 (0) 370 65 65 99
Email: peltorcommunications@mmm.com
Internet: www.3M.com/Peltorcomms

Please recycle. Printed in Sweden.
© 3M 2012. All rights reserved.